


佛山市顺德区盛大电缆有限公司

电梯监控电缆

- 视频监控电缆
- 铜绞线导体
- 优良的导电性
- 柔软PVC护套
- 高延展性
- 优良的电气属性
- 符合CE, ISO9001认证
- 请联系我们的业务代表，以了解其他产品详情。

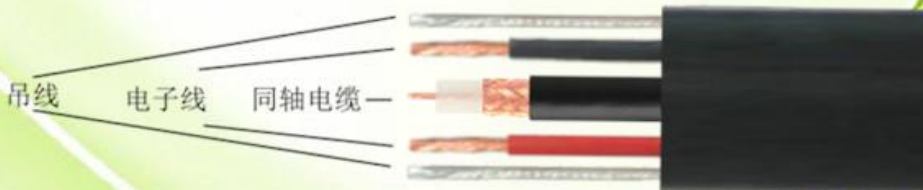

TYPE	ITEM		TSYV75-3+TVVB2X1.0+G	TSYV75-4+TVVB2X1.0+G	TSYV75-5+TVVB2X1.0+G
COAXIAL CABLE	INNER CONDUCTOR	MATERIAL	Bare copper(Strand)	Bare copper(Strand)	Bare copper
		DIMENSIONS	0.17mmx7	0.21mmx7	0.75mm
	INSULATION	MATERIAL	Soild Polyethylene	Soild Polyethylene	Soild Polyethylene
		DIAMETER	3.00±0.05mm	3.70±0.05mm	4.80±0.10mm
	SECOND SHIELD (BRAID)	MATERIAL	Copper Wire	Copper Wire	Copper Wire
		Coverage	≥80%	≥80%	≥80%
	JACKET	MATERIAL	Flexible-PVC	Flexible-PVC	Flexible-PVC
		DIAMETER	5.0mm±0.20mm	6.0mm±0.20mm	7.0mm±0.20mm
POWER CABLE	CONDUCTOR	MATERIAL	Strand copper	Strand copper	Strand copper
		DIMENSIONS	0.75mm ²	1.0mm ²	1.0mm ²
	INSULATION	MATERIAL	PVC	PVC	PVC
		DIAMETER	2.35mm	2.5mm	2.5mm
MESSENGER	STRAND GALVANIZED STEEL WIRE	DIMENSIONS	0.25mm*19	0.25mm*19	0.3mm*19
PACKING	CHOICES		Roll/100m	Roll or spool/200m	Spool/300m

ELECTRICAL SPECIFICATIONS (@68°F / 20°C)	COAXIAL CABLE INNER CONDUCTOR DC RESISTANCE	≤119.0Ω/km	≤79.0Ω/km	≤40.0 Ω/km
	ELECTRICAL WIRE CONDUCTOR DC RESISTANCE	≤18.6 Ω/km	≤18.6 Ω/km	≤18.6 Ω/km
	ELECTRICAL WIRE VOLTAGE RATE (V)	300/500	300/500	300/500
	COAXIAL CABLE CHARACTERISTIC CAPACITANCE	68pF/m	68 pF/m	66 pF/m
	CHARACTERISTIC IMPEDANCE	75Ω	75Ω	75Ω
	COAXIAL CABLE ATTENUATION (200MHZ)	28 dB/100m	22 dB/100m	15 dB/100m

佛山市顺德区盛大电缆有限公司

-- 中国工厂

中国广东省佛山市顺德区容桂街道高新技术开发区昌宝西路100号

电话: 0757-263 9094 传真: 0757-2662 5464

邮箱: Marketing@shengda-cable.com

香港迅发电业有限公司

-- 总公司

香港中环德辅道中272-284号兴业商业中心8楼803室

电话: 852-2559 3968 传真: 852-2857 5506

邮箱: shunfat@shunfat.hk.com

Find us on website:

www.shengda-cable.com

 **Shengda** SINCE 1985