


Sheng Da Cable Co., Ltd

- Drop cable
- Bare copper or Copper clad steel conductor
- Single or double aluminum foil
- Excellent braiding
- Flooding compound available.
- With messenger options
- PVC ,PE or LSZH jacket options available
- Sweep to 3GHz
- UL,ETL,CE,ISO9001 compliant
- Other options are available, please ask our sales representative for detail

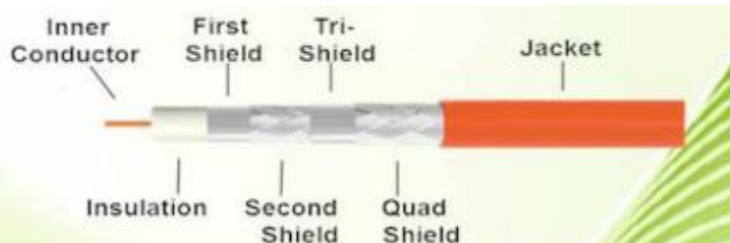

ITEM		4C-FB	5C-FB
INNER CONDUCTOR	MATERIAL	Bare copper/ CCS	Copper/ CCS
	DIMENSIONS	0.80±0.02mm	1.05±0.02mm
INSULATION	MATERIAL	Foamed Polyethylene	Foamed Polyethylene
	DIAMETER	3.70±0.10mm	5.00±0.10mm
SHIELD (TAPE)	MATERIAL	Aluminum/PET -Foil	Aluminum/PET -Foil
SHIELD (BRAID)	MATERIAL	Aluminum Wire	Aluminum Wire
	COVERAGE	70%±3%	70%±3%
JACKET	MATERIAL	PVC	PVC
	DIAMETER	6.0mm ±0.20mm	7.70mm ±0.15mm
PACKING	CHOICES	Roll/100m, spool/1000ft	Roll/100m, spool/1000ft
ELECTRICAL SPECIFICATIONS (@68°F / 20°C)	INNER CONDUCTOR DC	≤34.00 Ω/km	≤20.20 Ω/km
	CHARACTERISTIC CAPACITANCE	52 pF/m±3 pF/m	52 pF/m
	VELOCITY OF PROPAGATION	82%	82%
	CHARACTERISTIC IMPEDANCE	75±3Ω	75±3Ω
	STRUCTURAL RETURN LOSS	(5-1000MHz)≥≥20dB	(300-2600MHz)≥18dB
ATTENUATION (@68°F / 20°C)			
Frequency dB/100m	90	220	470
4C-FB	7.60	12.10	18.20
5C-FB	5.95	9.50	14.50

SHENG DA CABLE MAINLAND CHINA

No.100 Changbao West
Shunde District, Foshan
Tel / Fax: 0086-020-
E-mail: Marketing@shengda-cable.com

SHUN FAT INNOVATIONS LIMITED HEAD OFFICE (Hong Kong)

Room 803, 8th Floor, Hing Yip Commercial Centre,
272-284 Des Voeux Road Central Hong Kong
Tel:852-2559 3968 Fax:852-2857 5506
E-mail:shunfat@shunfathk.com

Find us on website:

www.shengda-cable.com

